

**Xmelt**<sup>®</sup>

Automatic refill unit  
Hot-melt gluing system


## Xmelt automatic refill unit

Industrial hotmelt processes are more and more centered on reduction of interruptions, cleaning and maintenance. To meet the growing demand of customers, Baumer hhs extended its Xmelt series by a device, that sets standards. Integrated refill system Xmelt keeps the hotmelt level within the tank automatically. You concentrate on the essentials.

A wear-free capacitance sensor detects, when the hotmelt level gets too low and starts a refill with pellets from the nearby container. You can easily change over from a standard Xmelt system by removing the tank cap. Foreign matter does not come into the tank. Empty tank or overfilling are no more possible.

### Xmelt automatic refill unit

- To be mounted on standard melters
- Automatic refill from nearby containers or bags
- Expandable modular system
- Saves time for the operator
- Approved Xmelt Technology
- Melting zone in tank is always covered with hotmelt
- Operator does not get in touch with gases and heat

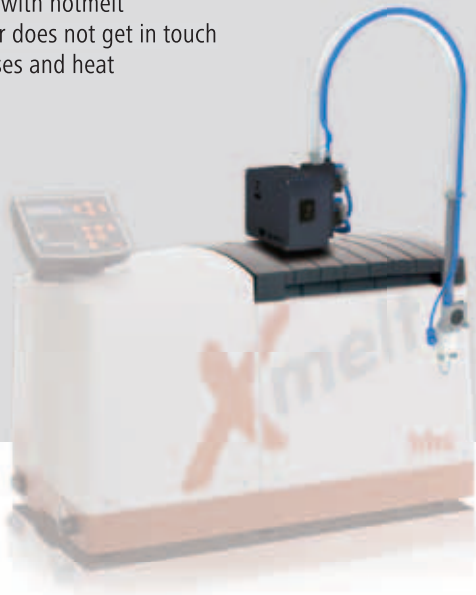

### Technical data

Vacuum hose	Available with	Level meter	Delivery rate	Distance max.
Length 6m	XM-04 / XM-08 / XM-12	Capacitance (non-contact)	>50kg/h dependent from hose length, pellet size, air pressure	horizontal 6m, vertical 3m

Further information and product advantages can be found under [www.xmelt.com](http://www.xmelt.com)